

CSP-8/16/32XTR.X5

8/16/32 Channel Penta-brid 1080P Lite 2U Digital Video Recorder



- Embedded processor
- H.264+/H.264 dual-stream video compression
- Support HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 12/24/32 channels IP camera inputs, each channel up to 5MP
- Max 48/96/128Mbps Incoming Bandwidth
- Smart Search and Intelligent Video System



System Overview

As a technology leader, we always the first to ever develop the shining new technology in the security industry, and today we present XVR. As the perfect solution to upgrade existing video surveillance systems, XVR supports penta-brid access technology such as HDCVI, AHD, TVI, CVBS and IP to effortlessly integrate with popular industry formats, offering an affordable solution loaded with flexible options.

Designed as a full compatibility product, XVR is able to provide end user the simplicity of analog system, namely lower system cost, simple installation and use of existing cable. It is ideal for a wide range of applications such as public safety, retail store, transportation, home protection and education.

Functions

Smart H.264+

Smart Codec, H.264+ can reduce up to 70% bit rate and storage requirements without having to invest in new cameras.

HDCVI/ AHD/TVI/CVBS Auto-detect

The XVR can auto recognize the signal of front-camera without any setting. It makes operation more friendly and convenient.

5MP Resolution

The XVR supports 5MP HD resolution (2560 x 1920) IPC input for recording, live viewing.

Spot Output(XVR5816S and XVR5832S)

It is made for a secondary monitor. This allows the operator to view one special monitor that assigned to selected cameras or video inputs from higher security areas.

Intelligent Video System (IVS)

With built-in intelligent video analytics, the XVR has the ability to detect and analyze moving objects for improved video surveillance. The XVR provides optional standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed.

Face Detection

It is a type technology being used in a variety of applications that search or identify individuals which show front cameras.

Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

Technical Specification	
System	
Main Processor	Embedded Processor
Operating System	Embedded LINUX
Display	
Interface	8CH: 1 HDMI, 1 VGA, 1 TV 16/32CH: 2 HDMI, 1 VGA, 1 TV
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768
Multi-screen Display	8CH: 1/4/8/9/16 16CH: 1/4/8/9/16/25 32CH: 1/4/8/9/16/25/36
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording

Video Detection and Alarm	
Trigger Events	Recording, PTZ, Tour, Alarm Out, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss,Tampering and Diagnosis
Alarm input	8/16/16
Relay Output	6

Playback and Backup	
Playback	8CH: 1/4/9 16/32CH: 1/4/9/16
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second), Smart search
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network

Storage	
Internal HDD	8 SATA Ports, up to 8TB capacity for each disk
eSATA	1 Port

Auxiliary Interface	
USB	8CH: 4 USB Ports (4 USB 2.0) 16/32CH: 4 USB Ports (2 USB 2.0 , 2 USB 3.0)
RS232	1 port, for PC communication & Keyboard
RS485	1 Port, for PTZ Control
RS422	1 Port, for PTZ Control

Third-party Support	
Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more

Audio and Video	
HDCVI Camera Input	8/16/32 Channel
IP Camera Input	8+4/16+8/32 Channel, each channel up to 5MP
Audio In/Out	8/16/16 Audio In, 1 Audio Out, BNC
Two-way Talk	1 Mic In, 1 Mic Out, BNC

Recording	
Compression	H.264+/H.264
Resolution	1080P, 1080N, 720P, 960H, D1, HD1, BCIF, CIF, QCIF
Record Rate	Main stream: 1080P(1~15fps) 1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps) Sub steram:D1/CIF/QCIF(1~15fps)
Bit Rate	1Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec

Network	
Interface	8CH: 1 RJ-45 Port (1000M) 16/32CH: 2 RJ-45 Port (1000M)
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE,DDNS, FTP, Alarm Server, P2P, IP Search (Support Dahua IP camera, DVR, NVS, etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF 2.42, CGI Conformant

Electrical	
Power Supply	AC100V-240V, 50/60Hz
Power Consumption	<35W (Without HDD)

Environmental	
Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 0~ 90% RH
Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F), 0~ 90% RH


Construction	
Dimensions	2U, 440mm×455mm×95mm (17.3" x 17.9" x 3.7")
Net Weight	6.5kg (14.32 lb) (without HDD)
Gross Weight	9.8kg (21.6lb)
Installation	Desktop installation/Rack-mounted

Certifications	
Certifications	FCC: Part 15, Subpart B: 2015
	CE: EN 55032:2015(Class B), EN 55024:2010+A1:2015, EN 50130-4:2011+A1:2014, EN 61000-3-2:2014, EN61000-3-3:2013
	UL:EN60950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013

Ordering Information


Type	Part Number	Description
8/16/32 Channel XVR	CSP-8XTR.X5	8 Channel Penta-brid 1080P Lite 2U Digital Video Recorder
	CSP-16XTR.X5	16 Channel Penta-brid 1080P Lite 2U Digital Video Recorder
	CSP-32XTR.X5	32 Channel Penta-brid 1080P Lite 2U Digital Video Recorder

Dimensions (mm)

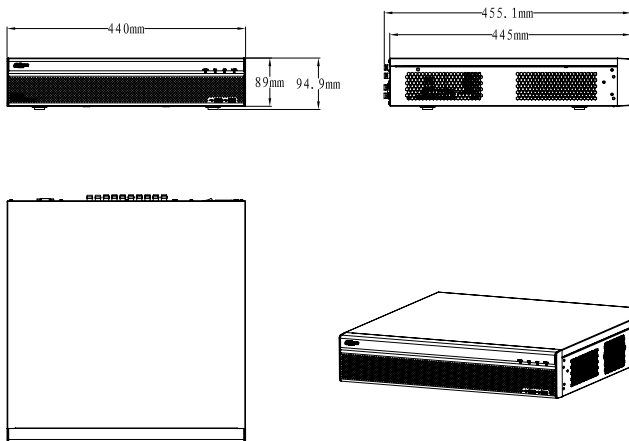


Rear Panel

CSP-8XTR.X5

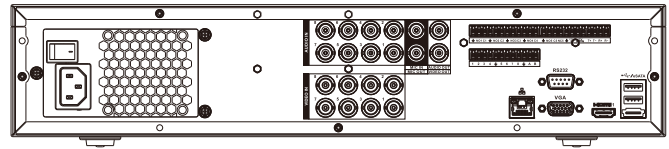

CSP-16XTR.X5

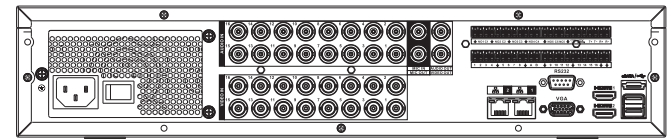

CSP-32XTR.X5

